


KerckhoffStone

CONCRETE HARDSCAPE SOLUTIONS

SLOTTED GRATE SERIES


FABRICATION NOTES:

1. DRAWING REPRESENTS STANDARD SHAPE & SIZES.
2. SLOTTED GRATES CAN BE CUSTOMIZED PER INDIVIDUAL PROJECT.
3. SLOTTED GRATES CAN BE FABRICATED WITH RADIUS. (2'-0" MIN. RADIUS)
4. WIDTH DIMENSIONS VARIES FROM 8" to 18" IN TOTAL SLOTTED GRATE WIDTH.

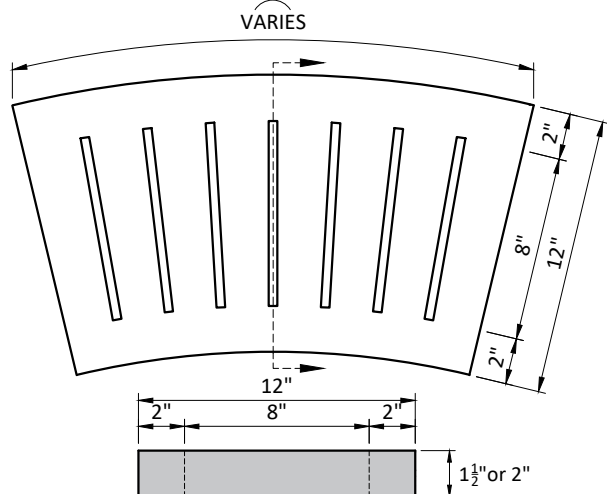


RADIUS SLOTTED GRATE

N.T.S.

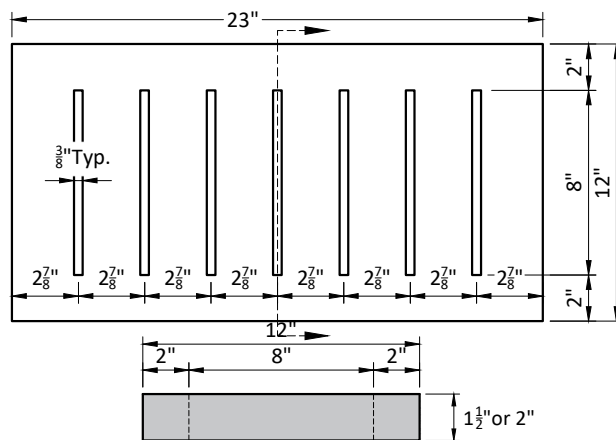


STRAIGHT SLOTTED GRATE

N.T.S.

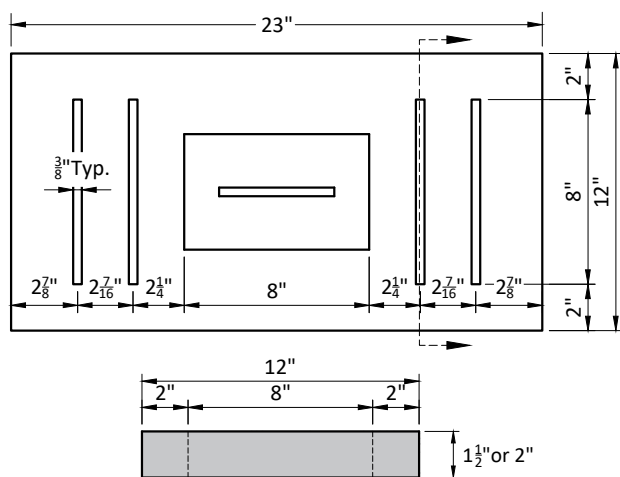


STRAIGHT SLOTTED GRATE

N.T.S.

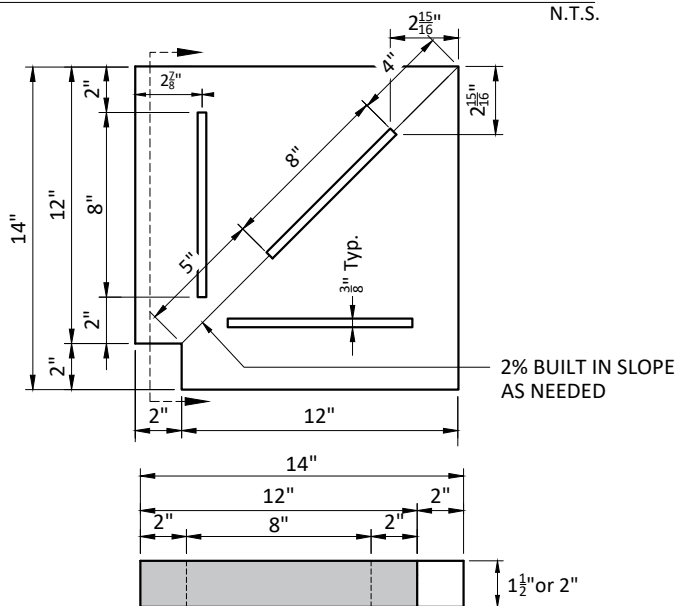

SLOTTED GRATE CORNER

N.T.S.

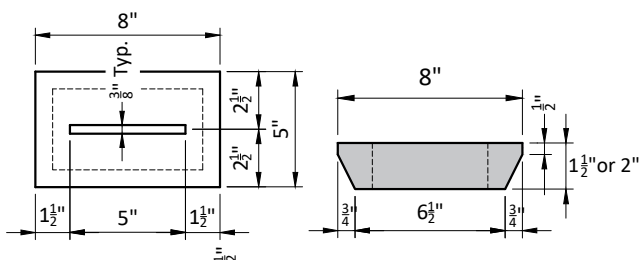

CLEAN OUT

N.T.S.

NOTES:

1. 6,500 P.S.I. DESIGN MIX @ 28 DAYS
2. ASTM C-1364 FOR CAST-STONE- 6% WATER ABSORPTION
3. SPECIFICATION FOR CAST-STONE 04720
4. AVAILABLE IN OVER 85 COLORS & ALL STANDARD KERCKHOFFSTONE TEXTURES
5. ALL CONCRETE IS COMPUTER BATCHED FOR CONSISTANCY w/ INTEGRAL WATER PROOFING ADMIX.
6. ALL CONCRETE IS HAND PLACED SO COLORS & TEXTURES DO VARY.
7. ABRASION AND MILDEW RESISTANT
8. ALL SLOTTED GRATES ARE REINFORCED WITH GALVANIZED STEEL.
9. 21 SQ IN. OPEN AREA PER 12" WIDE GRATE
10. MEETS VGB REQUIREMENTS
11. MEETS ADA FAST POOL REQUIREMENTS FOR SLIP RESISTANT



Certified Plant

PH: (239) 597-7218

FAX: (239) 566-8432

www.kerckhoffstone.com

1455 SW 4th Ave.

Delray Beach, FL 33444

© 2021