




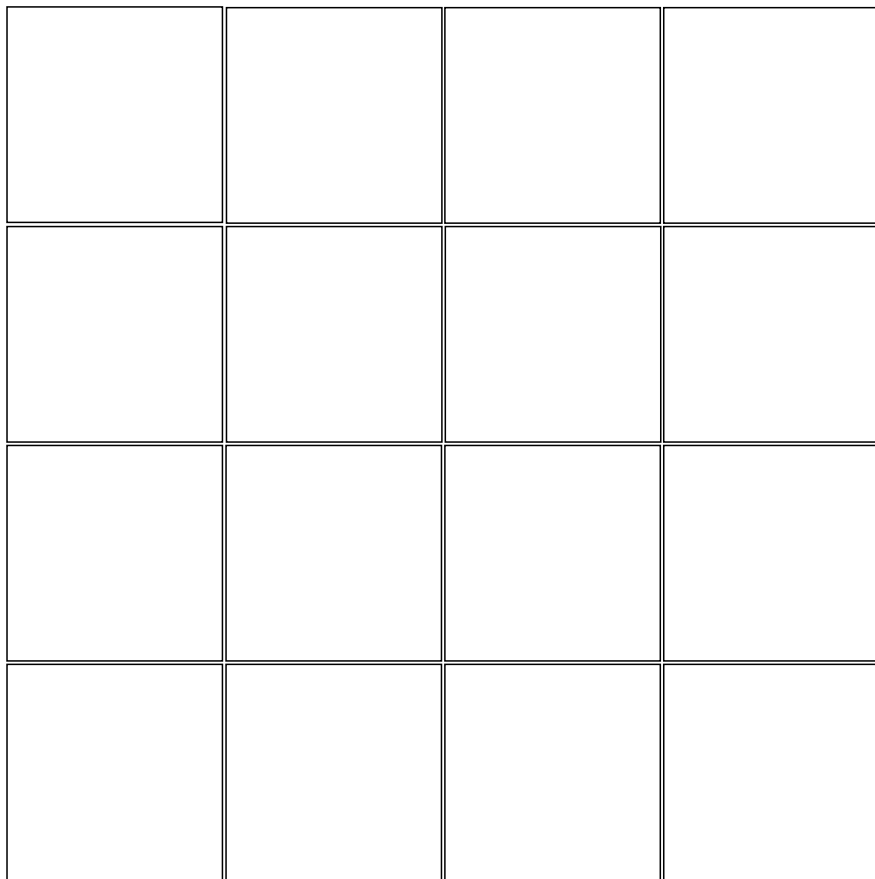

SQUARE PATTERN PAVER LAYOUT

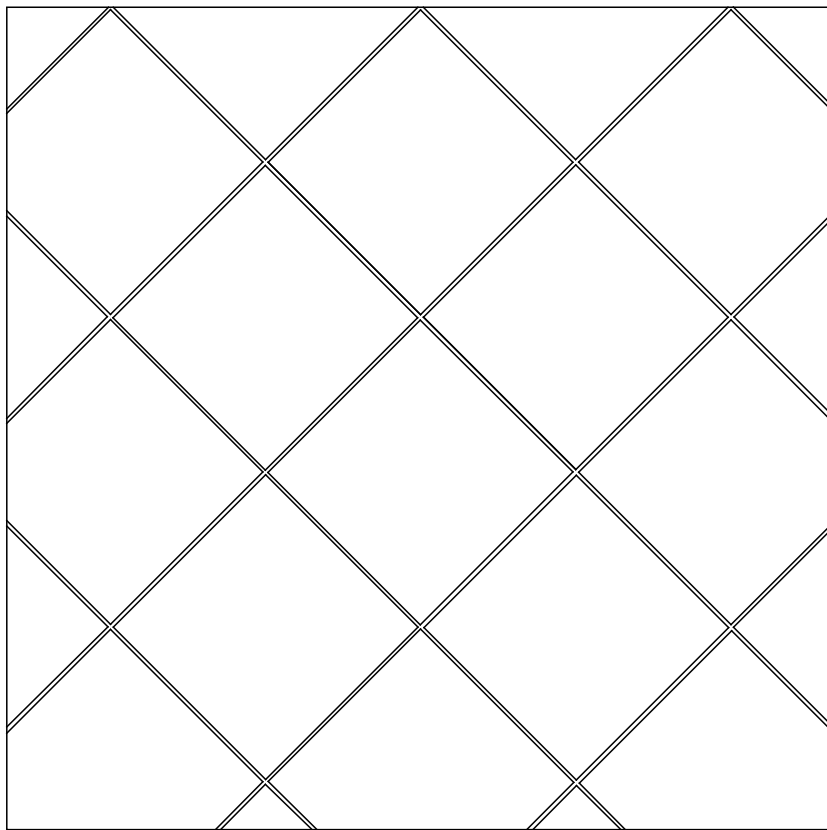

DIAGONAL PATTERN PAVER LAYOUT

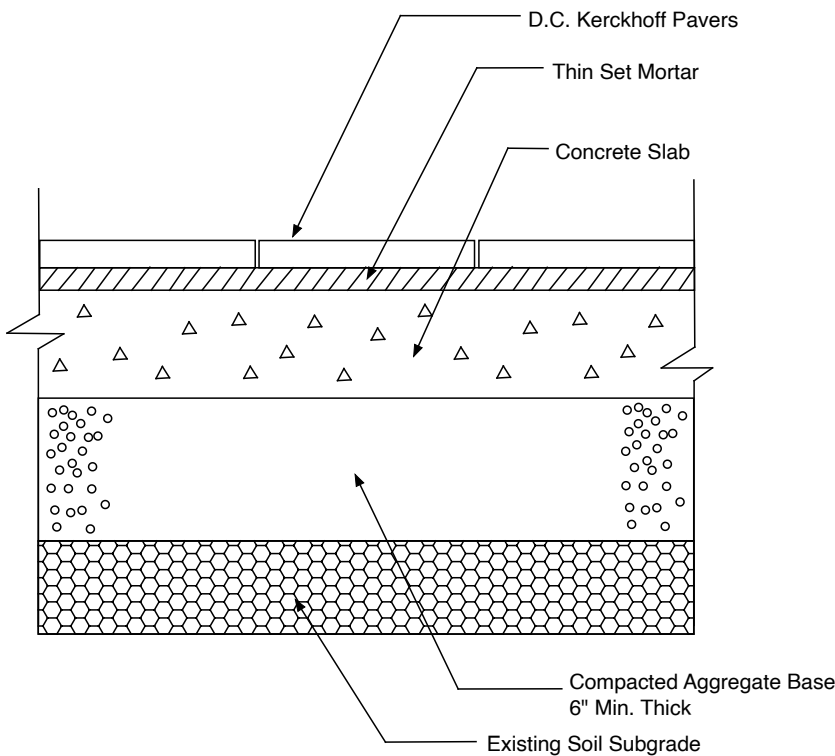


- NOTES:**
1. Concrete Slab Shall be Sloped to Provide Complete Surface Drainage; Provide Subsurface Drainage as Required.
 2. Slab to have Steel Trowel and Fine broom Finish. Do Not Use Curing Compounds. Maximum Variation in Slab 1/4" / 10'
 3. Expansion Joints are Mandatory. Architect must Specify Location and Detail on Drawings.


PAVER INSTALLATION ON CONCRETE SLAB

Coverage Area


- 36P - (35-5/8" x 23-5/8" Paver) = 33% Coverage
24P - (23-5/8" x 23-5/8" Paver) = 44% Coverage
2412P - (23-5/8" x 11-5/8" Paver) = 12% Coverage
12P - (11-5/8" x 11-5/8" Paver) = 11% Coverage

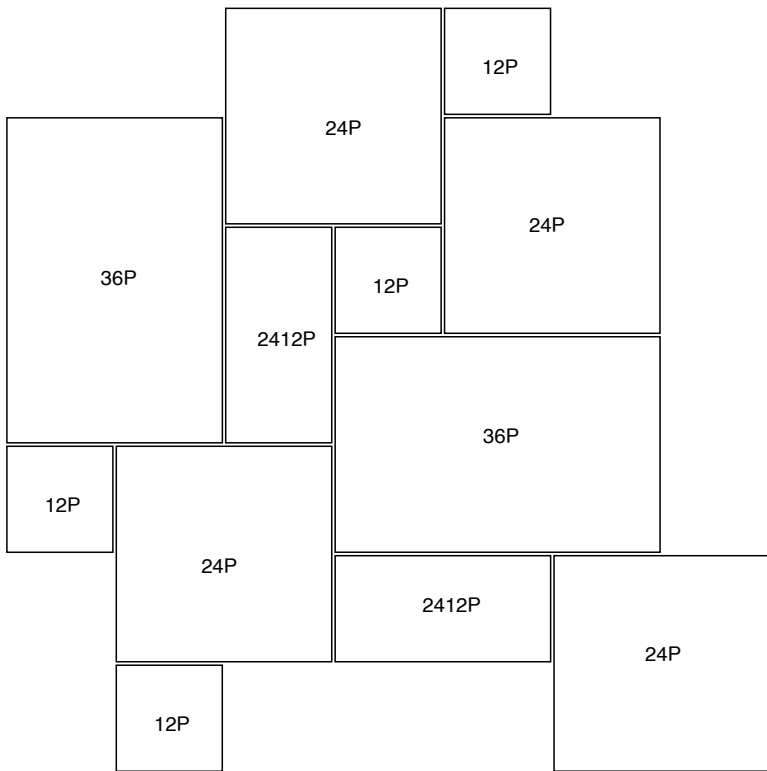

FRENCH PATTERN PAVER LAYOUT

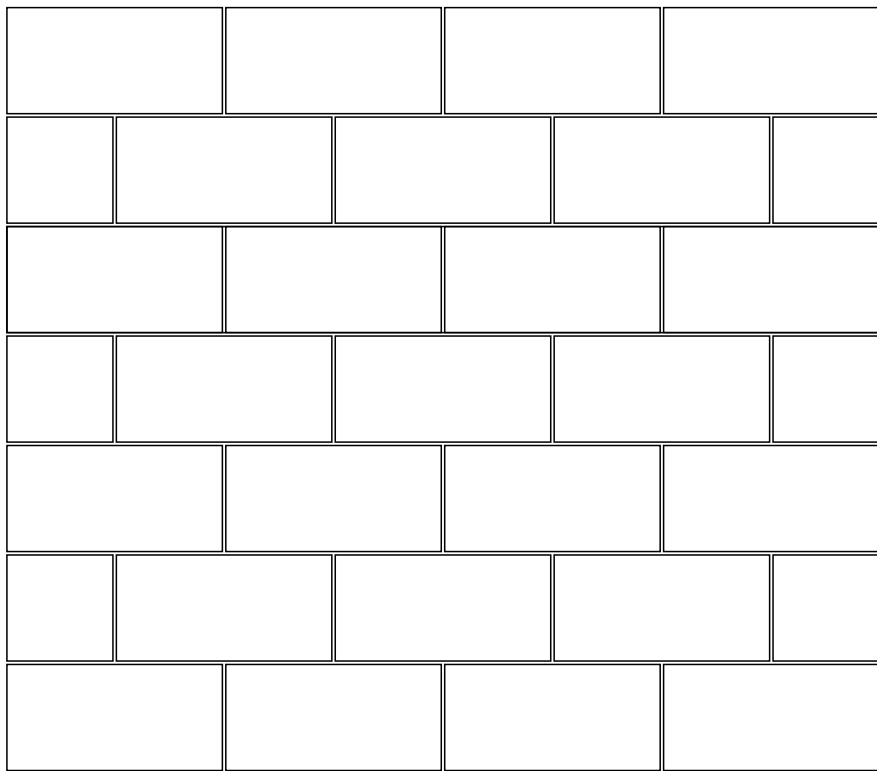

RUNNING BOND PATTERN PAVER LAYOUT

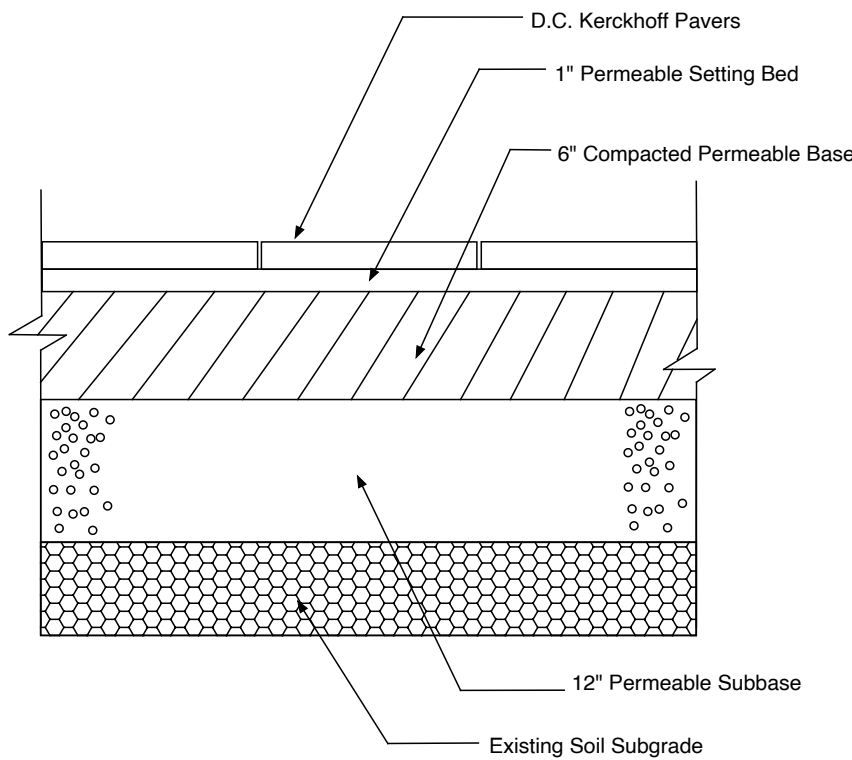

SAND SET PAVER INSTALLATION

D.C. KERCKHOFF COMPANY

PAVER PATTERNS & INSTALLATION GUIDE



PLANT CERTIFIED



1455 SW 4th Ave,
Delray Beach, FL 33444
(561) 330-3737