

Pool Copings and Slotted Grates





TABLE OF CONTENTS


TITLE

PAGE No.


- Pool Coping Designs..... 1
- Pool Coping Series & Skimmer Pad..... 2
- Typ. Poolside Coping w/Bullnose Isometric, Section & Plan View..... 3
- Pool Slotted Grates..... 4
- Triple Beam Pool Copings with Isometric, Section & Plan View 5
- Center Drain Slot Coping with Isometric, Section & Plan View..... 6
- Slotted Grate Zero Entry with Isometric, Section & Plan View..... 7

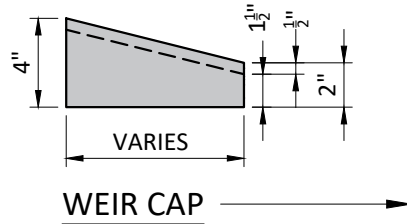


SQUARE EDGE




REGENT

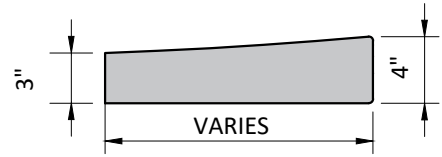


VISTA

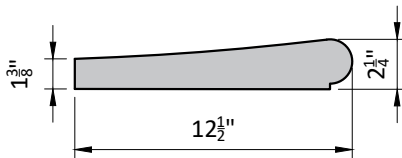


MEDIUM LINE




PARK




SAVOY

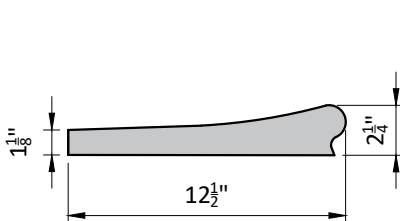


SLIM LINE



TRIESTE



SINGLE BULLNOSE

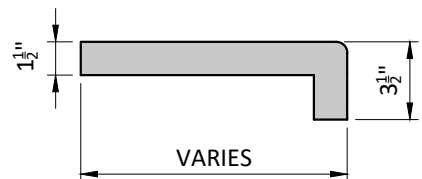

ENCLAVE

NOTES:

1. 6,500 P.S.I. DESIGN MIX @ 28 DAYS
2. ASTM C-1364 FOR CAST-STONE- 6% WATER ABSORPTION
3. SPECIFICATION FOR CAST-STONE 04720
4. AVAILABLE IN OVER 85 COLORS & ALL STANDARD KERCKHOFFSTONE TEXTURES
5. ALL CONCRETE IS COMPUTER BATCHED FOR CONSISTANCY w/ INTEGRAL WATER PROOFING ADMIX.
6. ALL CONCRETE IS HAND PLACED SO COLORS & TEXTURES DO VARY.
7. ABRASION AND MILDEW RESISTANT
8. MEETS VGB REQUIREMENTS
9. MEETS ADA FAST POOL REQUIREMENTS FOR SLIP RESISTANT


FABRICATION NOTES:

1. DRAWING REPRESENTS STANDARD SHAPE & SIZES.
2. POOL COPINGS CAN BE CUSTOMIZED PER INDIVIDUAL PROJECT.


Note:
Skimmer Cover Provided
by Contractor



Typ. Skimmer Pad

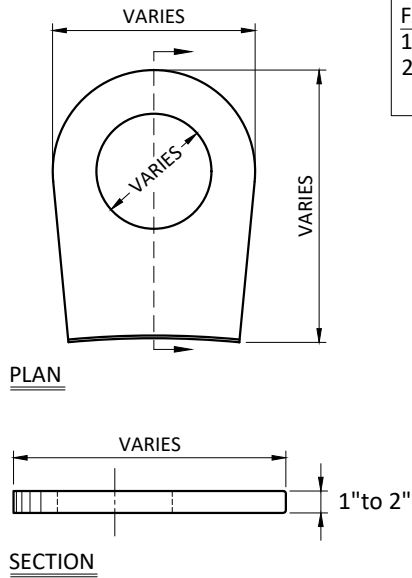


FABRICATION NOTES:
1. DRAWING REPRESENTS STANDARD SHAPE & SIZES.
2. POOL COPINGS CAN BE CUSTOMIZED PER
INDIVIDUAL PROJECT.

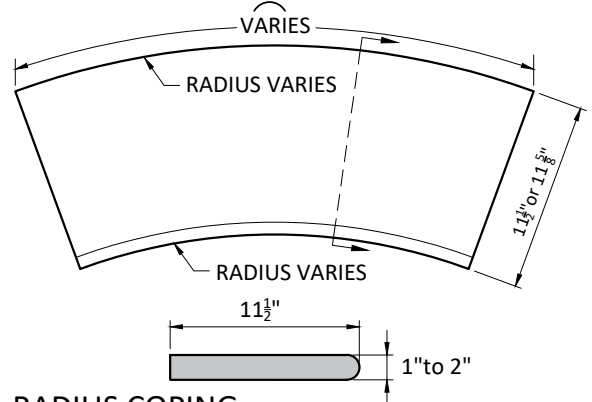


N.T.S.


N.T.S.

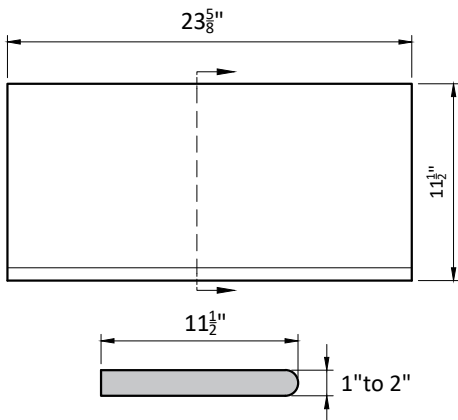


N.T.S.

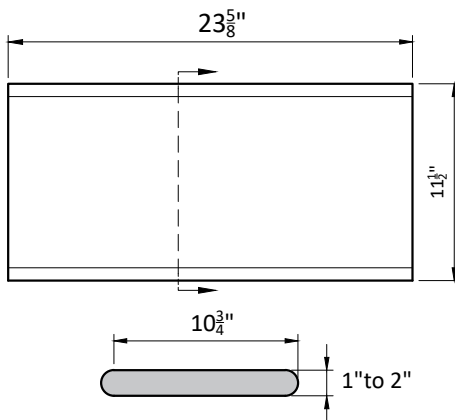


N.T.S.

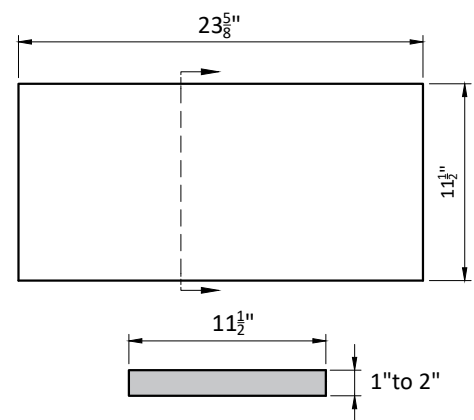


N.T.S.

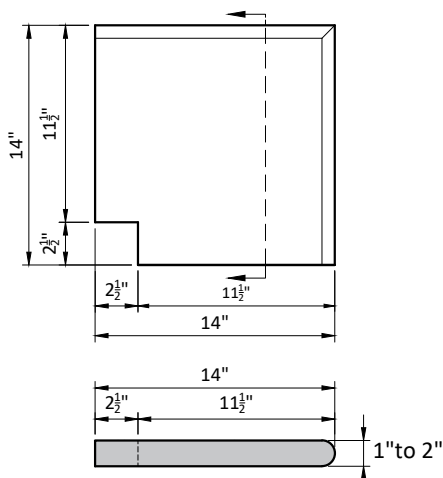

N.T.S.

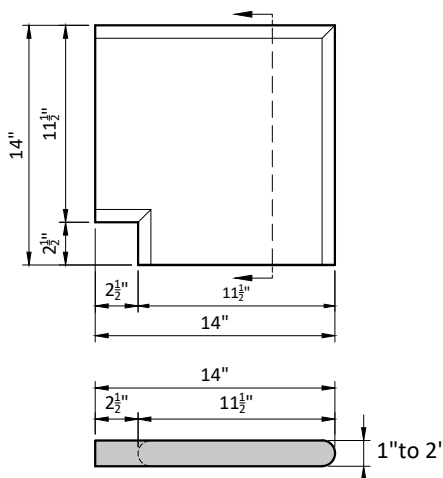


N.T.S.

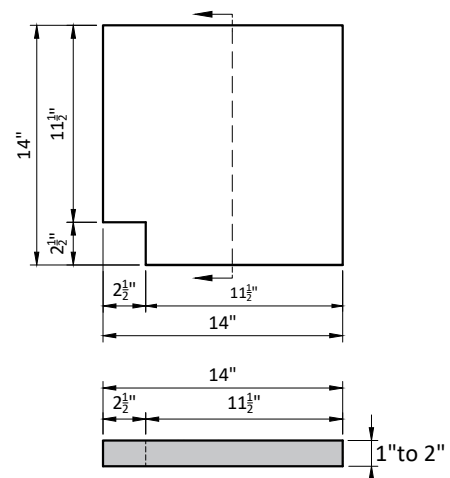

N.T.S.

FABRICATION NOTES:


1. DRAWING REPRESENTS STANDARD SHAPE & SIZES.
2. BULLNOSE COPINGS CAN BE CUSTOMIZED PER INDIVIDUAL PROJECT.

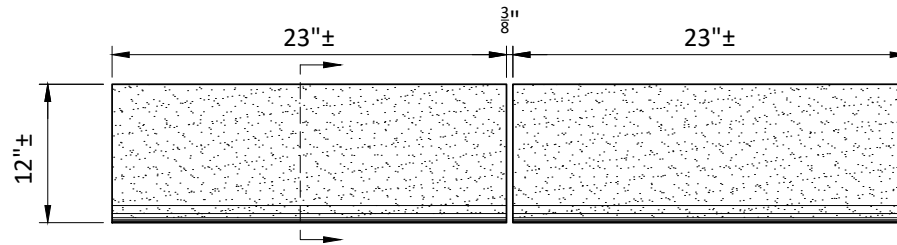

Typ. Single Bullnose Coping Plan View

N.T.S.


POOLSIDE COPING
W/ BULLNOSE

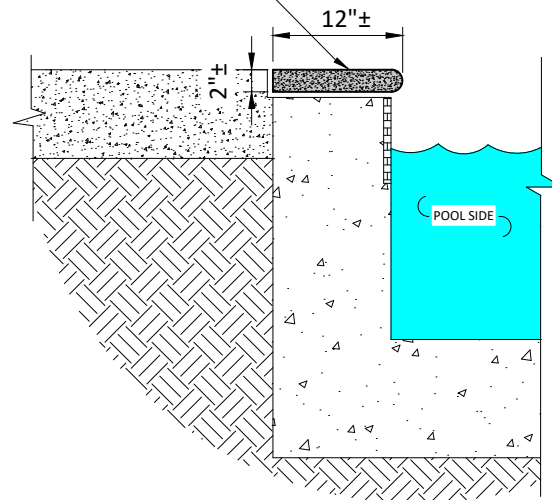

Typ. Single bullnose Coping Section

N.T.S.

POOLSIDE COPING
W/ BULLNOSE



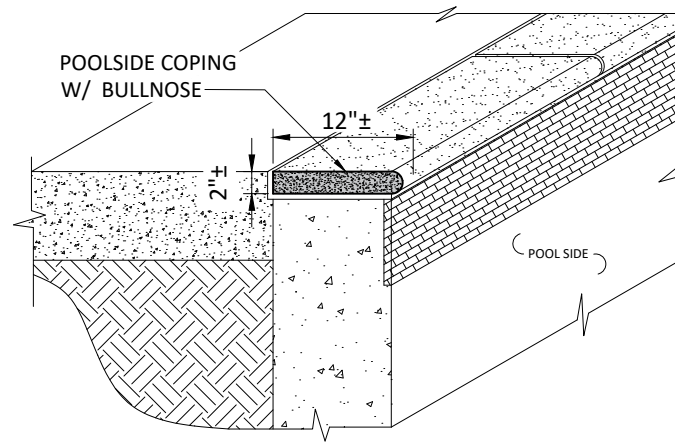


Isometric View

N.T.S.


FABRICATION NOTES:

1. DRAWING REPRESENTS STANDARD SHAPE & SIZES.
2. SLOTTED GRATES CAN BE CUSTOMIZED PER INDIVIDUAL PROJECT.
3. SLOTTED GRATES CAN BE FABRICATED WITH RADIUS. (2'-0" MIN. RADIUS)
4. WIDTH DIMENSIONS VARIES FROM 8" to 18" IN TOTAL SLOTTED GRATE WIDTH.

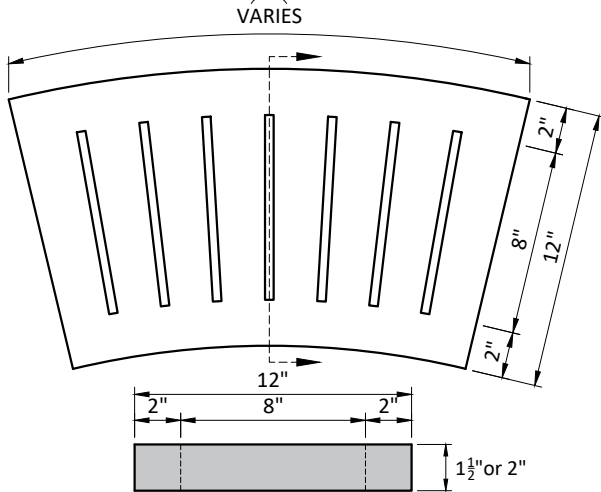


RADIUS SLOTTED GRATE

N.T.S.

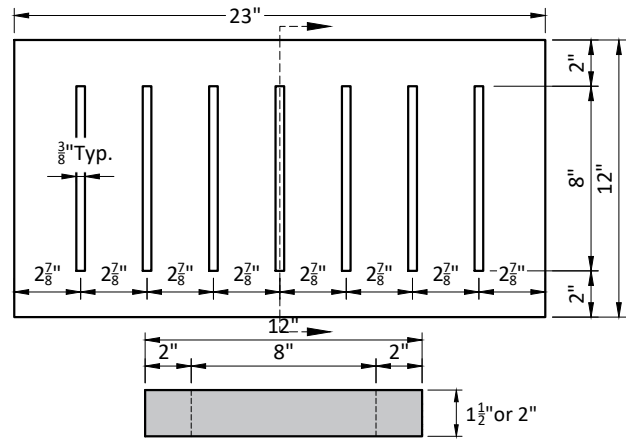


STRAIGHT SLOTTED GRATE

N.T.S.

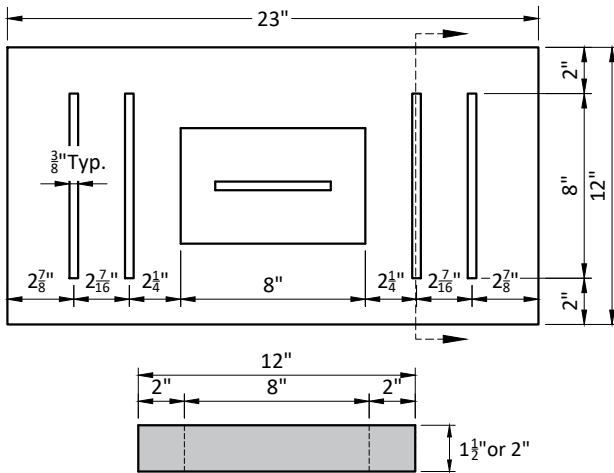


STRAIGHT SLOTTED GRATE

N.T.S.

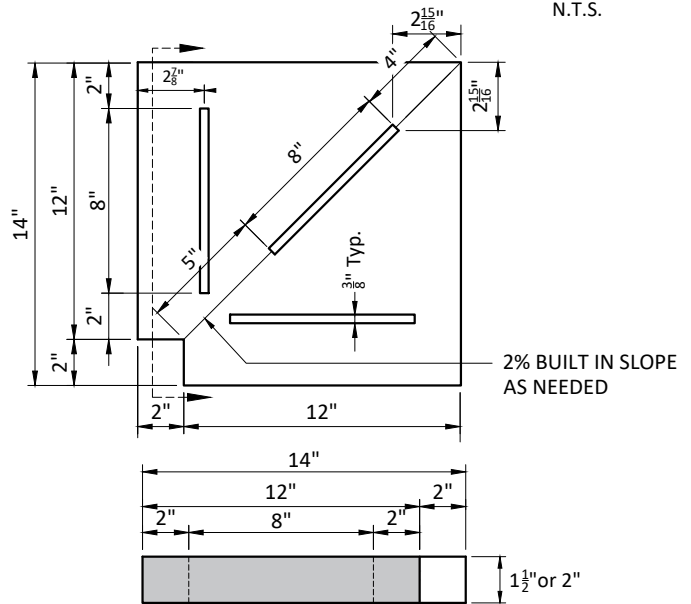

SLOTTED GRATE CORNER

N.T.S.

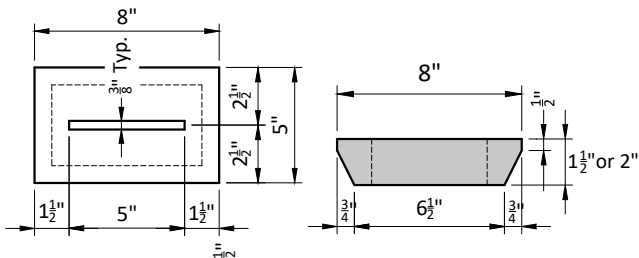

CLEAN OUT


N.T.S.

NOTES:

1. 6,500 P.S.I. DESIGN MIX @ 28 DAYS
2. ASTM C-1364 FOR CAST-STONE- 6% WATER ABSORPTION
3. SPECIFICATION FOR CAST-STONE 04720
4. AVAILABLE IN OVER 85 COLORS & ALL STANDARD KERCKHOFFSTONE TEXTURES
5. ALL CONCRETE IS COMPUTER BATCHED FOR CONSISTANCY w/ INTEGRAL WATER PROOFING ADMIX.
6. ALL CONCRETE IS HAND PLACED SO COLORS & TEXTURES DO VARY.
7. ABRASION AND MILDEW RESISTANT
8. ALL SLOTTED GRATES ARE REINFORCED WITH GALVANIZED STEEL.
9. 21 SQ. IN. OPEN AREA PER 12" WIDE GRATE
10. MEETS VGB REQUIREMENTS
11. MEETS ADA FAST POOL REQUIREMENTS FOR SLIP RESISTANT


FABRICATION NOTES:

1. DRAWING REPRESENTS STANDARD SHAPE & SIZES.
2. SLOTTED GRATES CAN BE CUSTOMIZED PER INDIVIDUAL PROJECT.
3. SLOTTED GRATES CAN BE FABRICATED WITH RADIUS. (2'-0" MIN. RADIUS)
4. WIDTH DIMENSIONS VARIES FROM 8" to 18" IN TOTAL SLOTTED GRATE WIDTH.

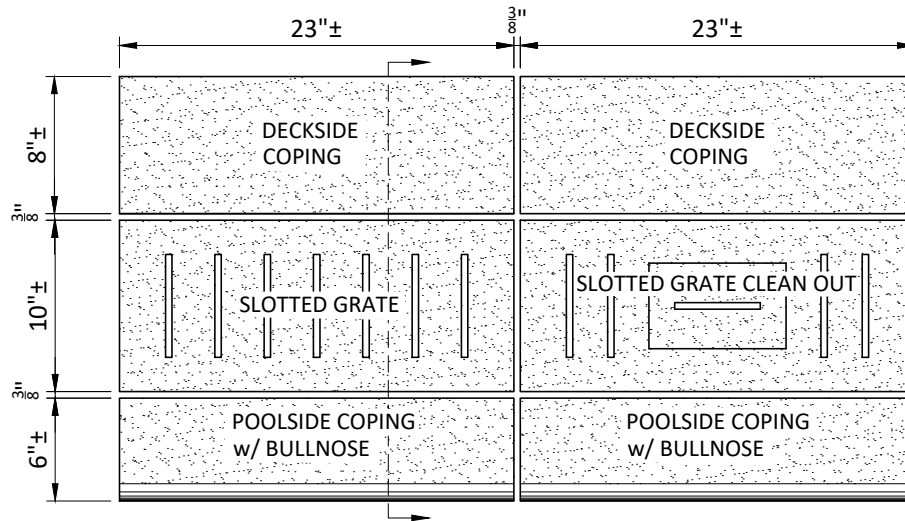


Typ. Triple Beam Pool Coping Plan View

N.T.S.

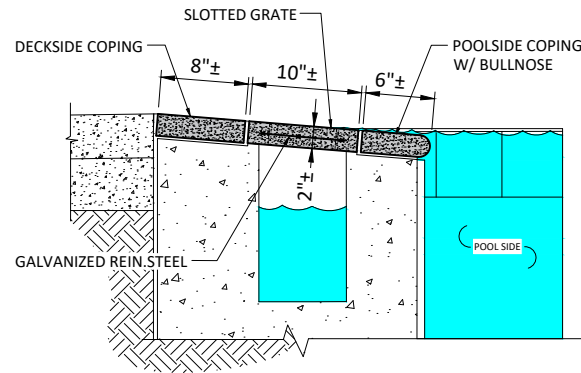

Typ. Triple Beam Pool Coping Section

N.T.S.

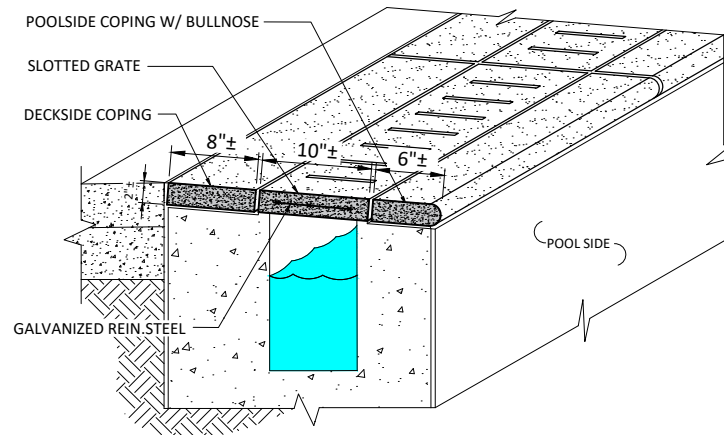


Isometric View

N.T.S.


FABRICATION NOTES:

1. DRAWING REPRESENTS STANDARD SHAPE & SIZES.
2. SLOTTED GRATES CAN BE CUSTOMIZED PER INDIVIDUAL PROJECT.
3. SLOTTED GRATES CAN BE FABRICATED WITH RADIUS. (2'-0" MIN. RADIUS)
4. WIDTH DIMENSIONS VARIES FROM 8" to 18" IN TOTAL SLOTTED GRATE WIDTH.

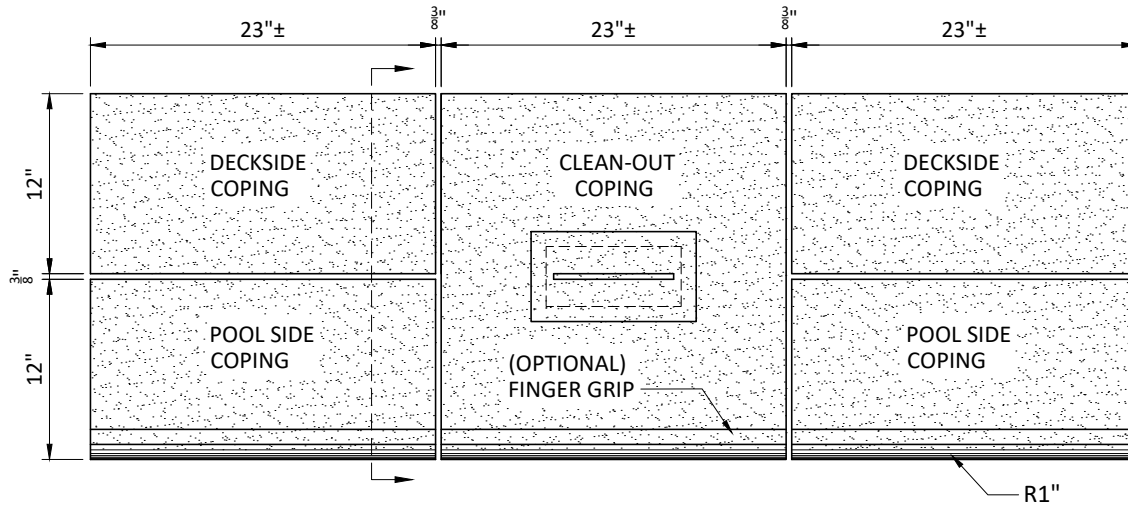


Center Slot Deck Side & Pool Side & Clean-out Copings Plan View

N.T.S.

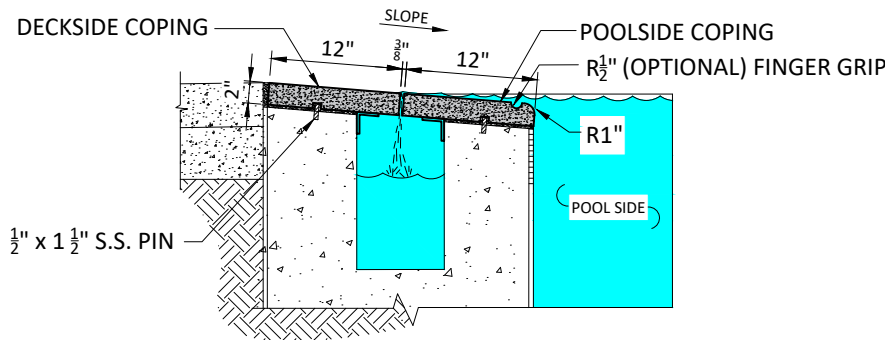

Center Slot Deck & Pool Side Section

N.T.S.

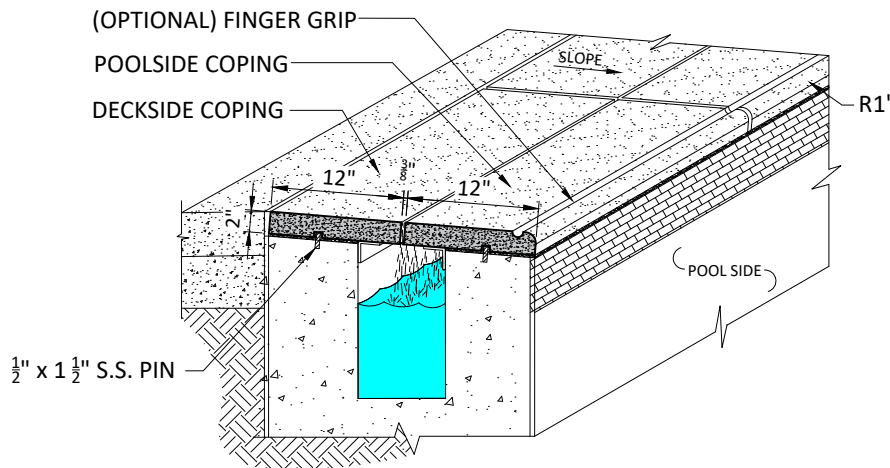


Isometric View

N.T.S.




FABRICATION NOTES:

1. DRAWING REPRESENTS STANDARD SHAPE & SIZES.
2. SLOTTED GRATES CAN BE CUSTOMIZED PER INDIVIDUAL PROJECT.
3. SLOTTED GRATES CAN BE FABRICATED WITH RADIUS. (2'-0" MIN. RADIUS)
4. WIDTH DIMENSIONS VARIES FROM 8" to 18" IN TOTAL SLOTTED GRATE WIDTH.

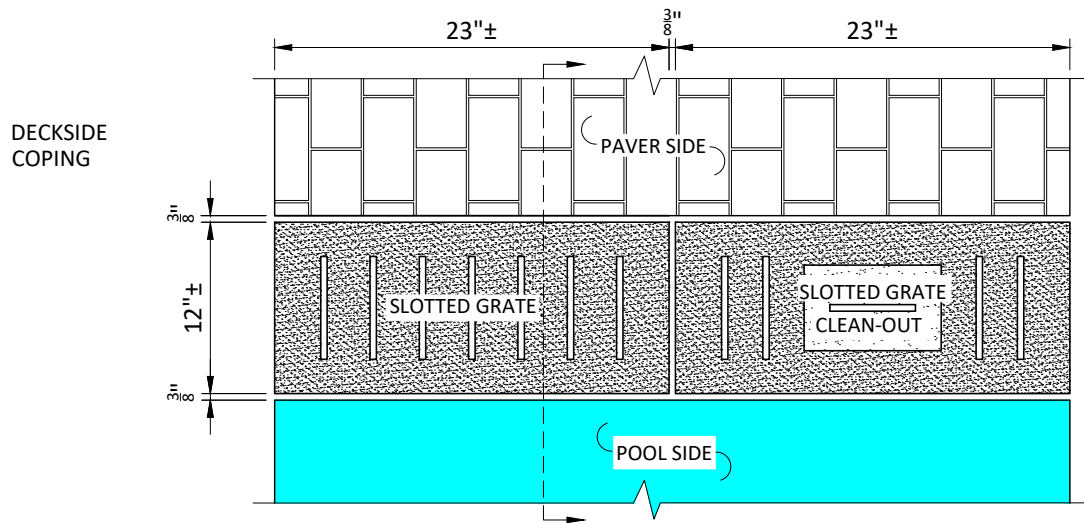



Slotted Grate Zero Entry Plan View

N.T.S.

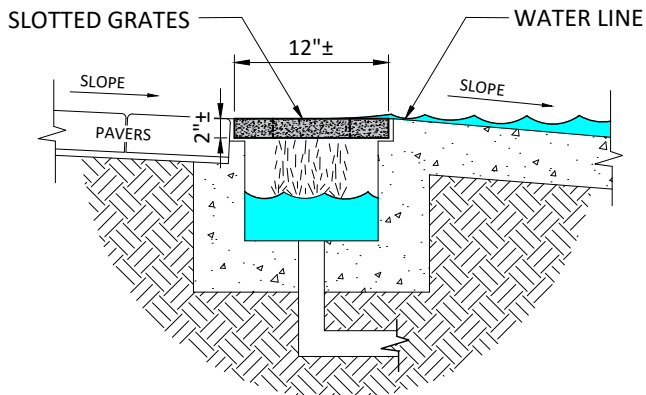

Slotted Grate Zero Entry Section

N.T.S.

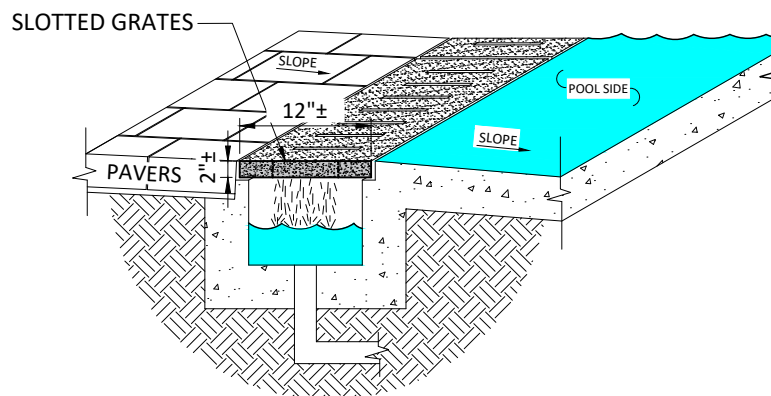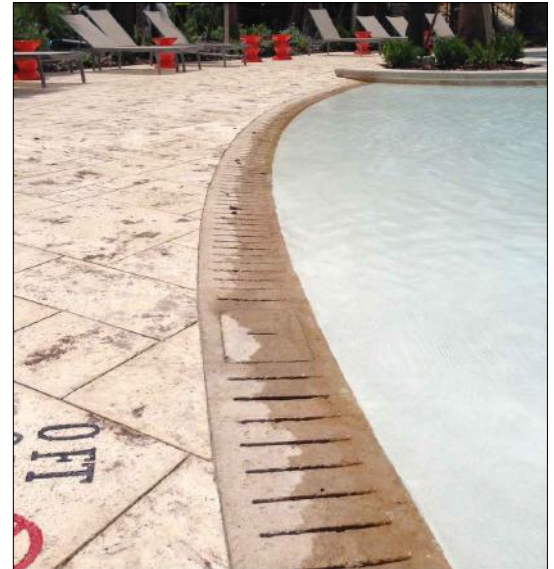

Isometric View

N.T.S.